



## SS-SP

### SSG/AP-0E

Photo.M18,PNP-NO,M12 plug,Receiver  
M18 DC WITH LATERAL ADJUSTMENT

## OVERVIEW

- Models with side sens. adjustment on axial and right angle optic
- LO/DO selectable output
- ATEX models, cat. 3, available on request
- LED status indicator for all versions
- Complete protection against electrical damages
- IP67 protection degree for all models
- Approvals: CE and cULus listed



## TECHNICAL FEATURES

### Detection properties

Nominal sensing distance	8m
Thermal drift of Sr	$\leq 10\%$ Sr
Repeat Accuracy	5%
minimum detectable object	$\varnothing$ 4mm
Sensitivity adjustment	No

## Application

Function Principle	Receiver
--------------------	----------

Emitter/Receiver	Receiver
------------------	----------

Optic position	Axial
----------------	-------

## Outputs

Output type	PNP NO
-------------	--------

Output Function	NO
-----------------	----

Switching frequency	250Hz
---------------------	-------

Response time	2ms
---------------	-----

## Electrical data

Operating Voltage	10...30VDC
-------------------	------------

No-Load supply current	$\leq 20\text{mA}$
------------------------	--------------------

Load current	$\leq 100\text{mA}$
--------------	---------------------

Leakage current	$\leq 10\mu\text{A}$
-----------------	----------------------

Output voltage drop	$\leq 2,5\text{V}@I_{\text{load}}=100\text{mA}$
---------------------	---

Max ripple content	$\leq 10\%$
--------------------	-------------

LED indicators	Yellow (status output)
----------------	------------------------

Time delay before availability	$\leq 200\text{ms}$
--------------------------------	---------------------

Short-circuit protection	Yes
Reverse Polarity Protection	Yes
Emission	
Interference to external light	5000lux (incandescent lamp), 10000lux (sunlight)
Impulsive Overvoltage Protection	Yes

#### Mechanical data

Dimensions	M18 x 1 /L =78mm
Weight	30g
Housing Material	PBT / PC plug
Connections	M12 plug
Active Head Material	PMMA
Tightening torque	1Nm
Operating temperature	- 25°C...+ 70° C (Without freeze)
Diameter/Dimension	M18

#### Test/Approvals

Approvals	CE cULus
EMC compatibility	EN 60947-5-2
Shocks and vibrations	Vibration IEC 60068-2-6 / Shock IEC 60068-2-27

Degree of protection	IP67
----------------------	------

## Accessories

Supplied Accessories	nuts M18 x 1, screwdriver
----------------------	---------------------------

## Generical Data


Dimensions	M18 x 1 /L =78mm
------------	------------------

Operating Temperature	- 25°C...+ 70°C (Without freeze)
-----------------------	----------------------------------


Mechanical Protection	IP67
-----------------------	------

# CONNECTIONS

Electrical diagram

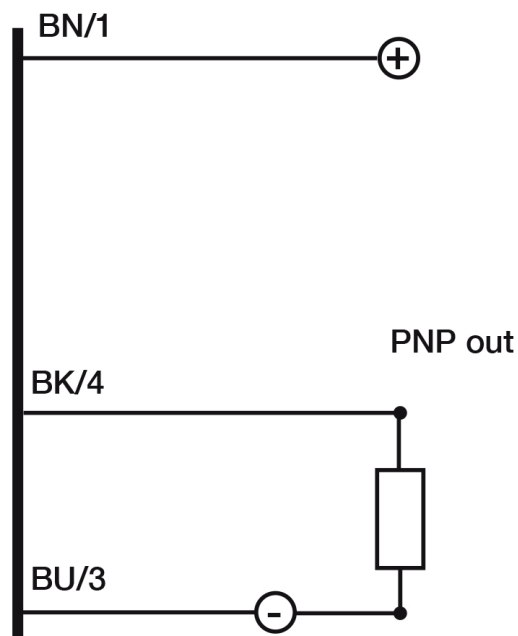

Connector

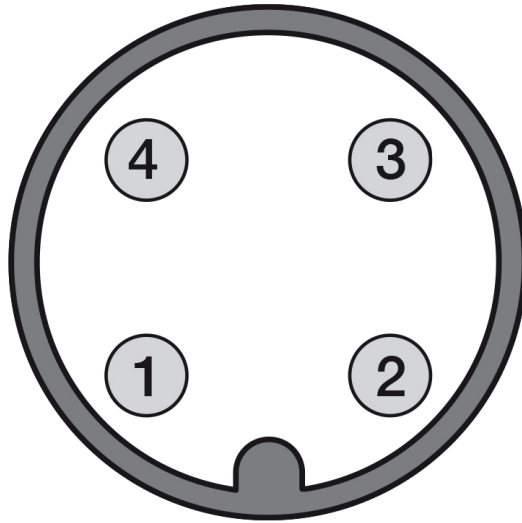

## OTHERS

Dimensions

Image:

**Datasensing  
S.r.l.**

Strada S.Caterina, 235  
41122 Modena (MO)  
Tel. 059 420411  
Fax 059 253973  
E-mail  
info@datasensing.com

**date of  
printing**  
11/04/2025  
04:26:47