


# US18

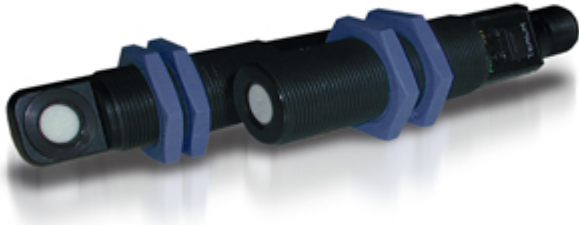

95B040000

US18-PA-5-N03-OH  
ULTRASONIC SENSOR

## OVERVIEW

- Digital bipolar PNP/ NPN NO /NC configurable output model
- Digital and 0-10 V / 4-20 mA configurable analogue output model
- Operating range of 200 mm...8m
- Minimum resolution: 1 mm
- Analogue output Linearity: +/- 0.2% of span from 200 to 8000 mm; +/- 0.1% of span from 500 to 8000 mm (1 mm minimum)
- Minimum window size: 20mm
- Repeatability: 1 mm
- Hysteresis: 5 mm
- Response Time: 100 ms to 1600 ms
- DIP SWITCH selectable
- Access to bank of 8 DIP switches through sealed cover for superior user functionality
- Fast, easy-to-use REMOTE TEACH - Mode programming; no potentiometer adjustments
- Wide operating range of -20° to +70°C with compensation function
- Rugged encapsulated design for harsh environments
- Unique housing design allows for multiple mounting configurations
- Euro-style quick-disconnect fitting

## TECHNICAL FEATURES

Detection properties

Nominal sensing distance	300 mm
--------------------------	--------

Sensitivity adjustment	Teach-in
------------------------	----------

#### Application

Description	M18 tubular - axial emission
-------------	------------------------------

Functions	Object detection/distance meas.
-----------	---------------------------------

#### Outputs

Output type	NPN / PNP
-------------	-----------

Response time	5,000
---------------	-------

#### Electrical data

Operating Voltage	10-30 VDC
-------------------	-----------

Emission	300kHz
----------	--------

#### Mechanical data

Dimensions	Ø18x91
------------	--------

Connections	M12
-------------	-----

Material	Plastic - PE
----------	--------------

#### Generical Data

Dimensions	Ø18x91
------------	--------

## Datasensing S.r.l.

Strada S.Caterina, 235  
41122 Modena (MO)  
Tel. 059 420411

**date of  
printing**  
25/11/2024  
22:41:15

Fax 059 253973

E-mail

[info@datasensing.com](mailto:info@datasensing.com)